



Applications


- For broadband applications

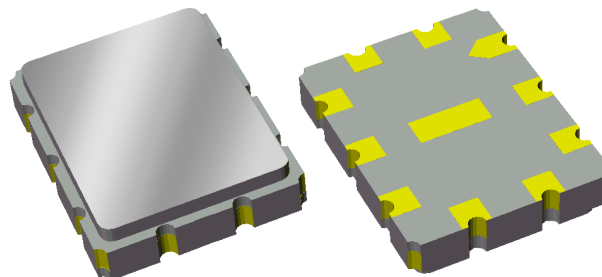

Product Features

- Typical 3dB bandwidth of 44.0 MHz
- High attenuation
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Replaces Sawtek P/N 851943 (BW 3dB=44 MHz)
- Hermetic
- RoHS compliant (2002/95/EC), Pb-free 

Functional Block Diagram

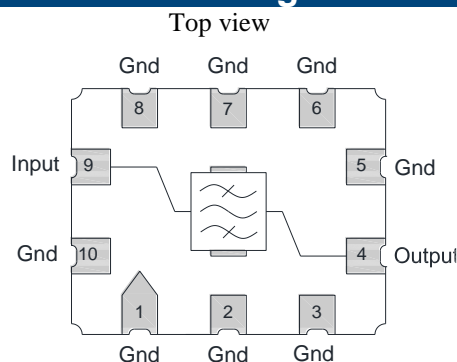

General Description

The 856073 is a 140 MHz, SAW-based IF Filter. It's High Selectivity makes it an excellent choice for a wide range of applications such as instrumentation, test and measurement, terrestrial, microwave and Network Infrastructure. 856073 has a single-ended input and output and comes in an industry standard hermetically sealed surface mount package that is RoHS compliant and Pb-free.

Pin Configuration

Pin #	SE	Description
4		Output
5		Output return
9		Input
10		Input Return
1,2,3,6,7,8		Case Ground

Ordering Information

Part No.	Description
856073	Packaged Part
856073-EVB	Evaluation Board

Standard T/R size = 2,000 units/reel

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-40 to +85 °C
Operable Temperature	0 to +70 °C

Electrical Specifications ⁽¹⁾



Operating Temperature Range: ⁽²⁾ 0 to +70 °C

Parameter ⁽³⁾	Conditions	Min	Typical	Max	Units
Center Frequency	-	-	140	-	MHz
Maximum Insertion Loss	-	-	21.75	22.5	dB
Lower 1 dB Bandedge ⁽⁴⁾	-	-	119.4	122.0	MHz
Upper 1 dB Bandedge	-	158.0	160.8	-	MHz
Lower 3 dB Bandedge ⁽⁴⁾	-	-	118.0	119.1	MHz
Upper 3 dB Bandedge	-	160.9	162.0	-	MHz
Lower 40 dB Bandedge ⁽⁴⁾	-	112.95	113.6	-	MHz
Upper 40 dB Bandedge	-	-	166.3	167.05	MHz
Amplitude Variation	122.0 – 158.0 MHz	-	0.5	1.5	dB p-p
Phase Linearity	122.0 – 158.0 MHz	-	2.55	5.5	deg p-p
Group Delay Variation	122.0 – 158.0 MHz	-	10.62	30	ns p-p
Absolute Delay	-	-	0.768	-	µsec
Relative Attenuation ⁽⁴⁾	10 – 160 MHz	57	64	-	dB
	60 – 112 MHz	48	57	-	dB
	168 – 250 MHz	43	56	-	dB
	250 – 300 MHz	52	57	-	dB
Nominal Impedance ⁽⁵⁾	Single Ended	-	50	-	Ω

Notes:

1. All specifications are based on the TriQuint schematics for the reference designs shown on page 3.
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature.
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances.
4. All attenuation measurements are measured relative to minimum insertion loss
5. This is the optimum impedance in order to achieve the performance shown.

Evaluation Board

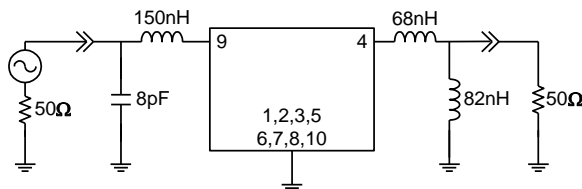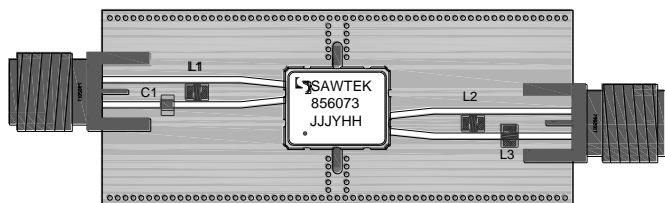


Notes:

1. Actual matching values may vary due to PCB layout and parasitics
2. PCB: 9.00 x 7.01 x 1.50; Construction: ½ oz Cu Top Layer; TLY-5A (.0075) ½ oz Cu Middle Layer, FR4; ½ oz Cu Bottom Layer. (dimensions are in inches)

Bill of Material

Reference Des.	Value	Description	Manuf.	Part Number
L1	150nH	Surface mount, 0805CS	Coilcraft	0805CS-151XJBC
L2	68nH	Surface mount, 0805CS	Coilcraft	0805CS-680XJBC
L3	82nH	Surface mount, 0805CS	Coilcraft	0805CS-820XJBC
C1	8pF	Ceramic chip, 0805	Murata	GRM40COG080J50
SMA	N/A	SMA connector	Radiall USA	9602-1111-018
PCB	N/A	3-layer	Multiple	960978





PCB Mounting Pattern

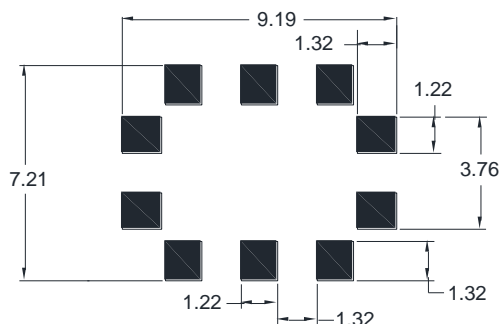


Notes:

1. All dimensions are typical in millimeters. Angles are in degrees.
2. This drawing specifies the mounting pattern used on the TriQuint evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes


Performance Plots

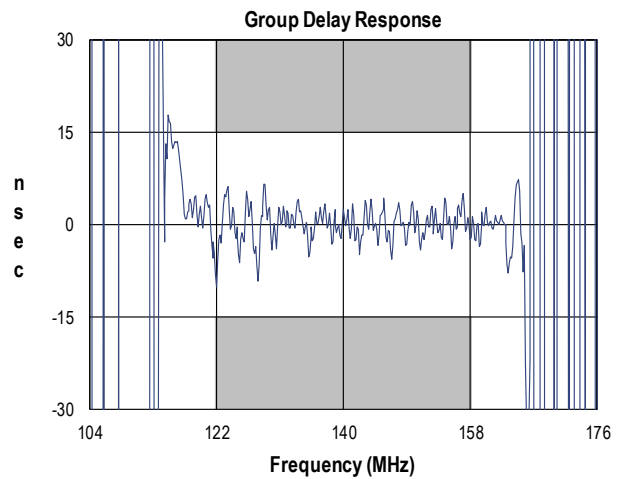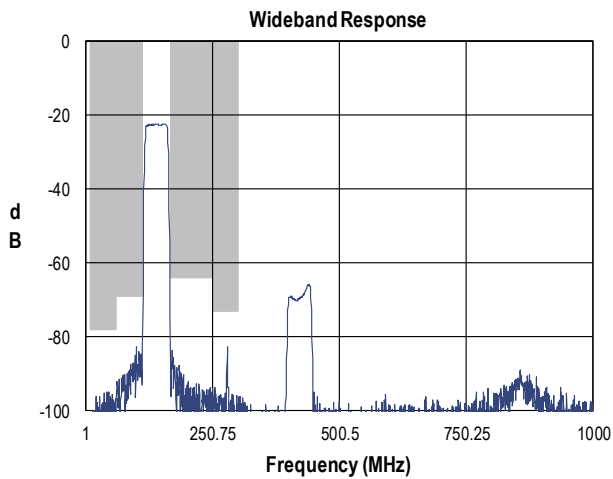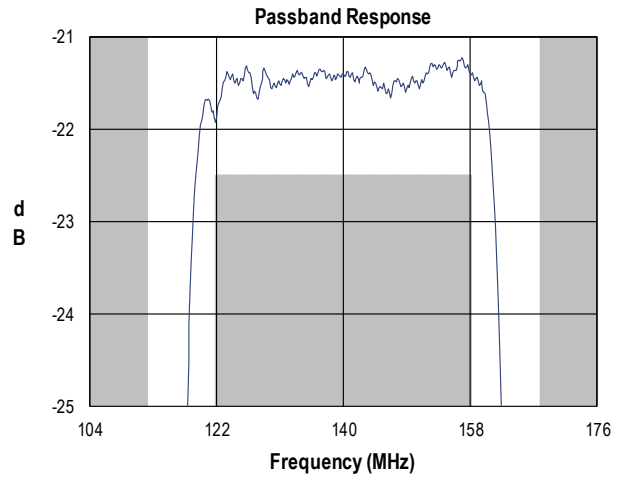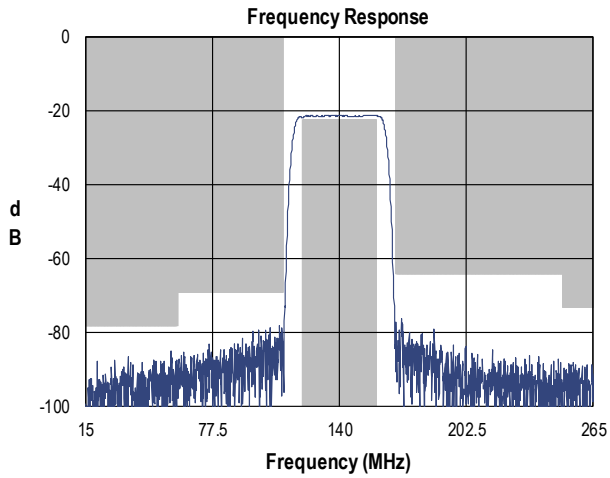


Input Smith Chart

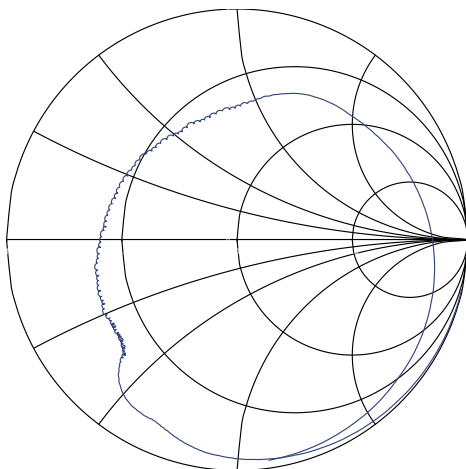

Output Smith Chart

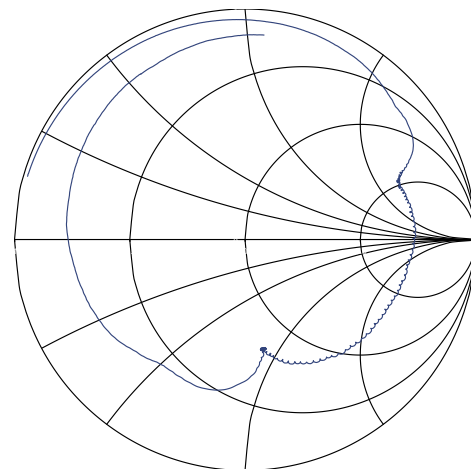


Package Information, Marking and Dimensions

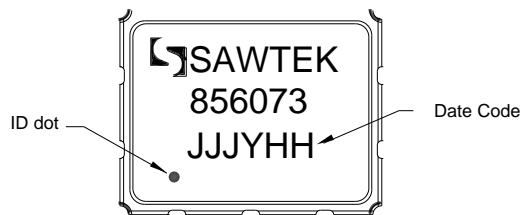

Package Style: SMP 35B
 Dimensions: 9.00 x 7.01 x 1.50 mm

Package for Surface Mount Technology
 Terminations: Au plating 0.5 - 1.0µm, over a 2-6µm Ni Plating



The date code consists of: JJJ = Julian, 3 digits
 Y = last digit of year and HH = hour 2 digits

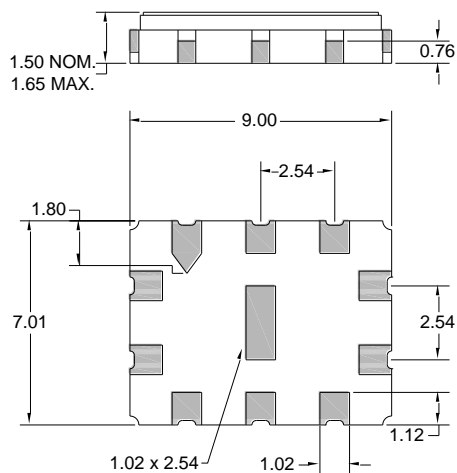

Notes:

1. All dimensions shown are typical in millimeters.
2. An asterisk (*) in front of the marking code indicates prototype.
3. All tolerances are ±0.15mm except overall length and width ±0.10mm.

Tape and Reel Information

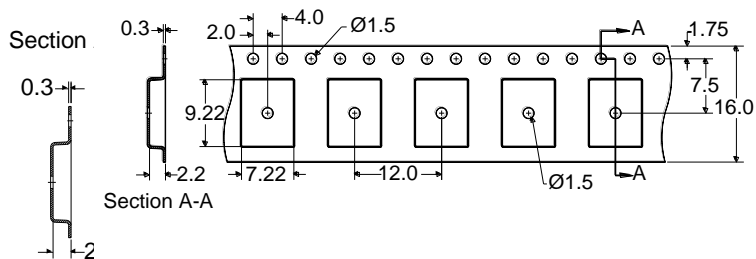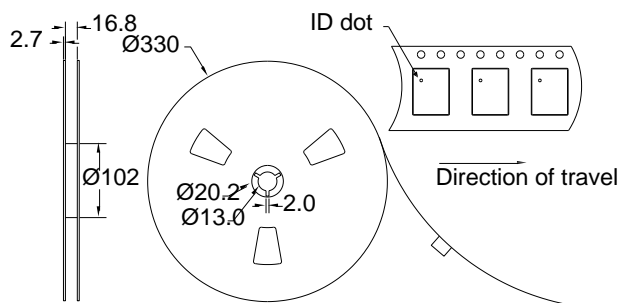

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: 1B
Test: Human Body Model (HBM)
Standard: ESDA/JEDEC JS-001-2012

ESD Rating: B
Test: Machine Model (MM)
Standard: JEDEC Standard JESD22-A115

MSL Rating

Not applicable. Hermetic package.
Test: 260 °C convection reflow
Standard: JEDEC Standard IPC/JEDEC J-STD-020

Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.triquint.com **Tel:** **877-800-8584**
Email: customer.support@qorvo.com

For information about the merger of RFMD and TriQuint as Qorvo:

Web: www.qorvo.com

For technical questions and application information: **Email:** flapplication.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.