sawtechno.ru
mail@sawtechno.ru
121351, Москва г., а/я 35
(499) 322-06-38

Общество с ограниченной ответственностью
«Научно-производственное предприятие «Техно-ПАРК»
(ООО «НПП «Техно-ПАРК»)
Юридический и фактический адрес: 121351, г. Москва,
ул. Ивана Франко, д. 48

Технические характеристики генератора VG3225VFN

Производитель: Epson

Поставщик: ООО «НПП «Техно-ПАРК»

Научно-производственное предприятие ООО «НПП «Техно-ПАРК» разрабатывает и поставляет полосно-пропускающие радиочастотные фильтры на поверхностных акустических волнах (ПАВ) и устройства на их основе.

VOLTAGE-CONTROLLED CRYSTAL OSCILLATOR (VCXO)
OUTPUT : LV-PECL, LVDS

Pb Free RoHS Compliant

Product Number
VG3225EFN X1G005361xxxx00
VG5032EFN X1G005471xxxx00
VG7050EFN X1G005491xxxx00
VG3225VFN X1G005461xxxx00
VG5032VFN X1G005481xxxx00
VG7050VFN X1G005501xxxx00

VG3225 / 5032 / 7050EFN
VG3225 / 5032 / 7050VFN

- •Frequency range : 25 MHz to 250 MHz
- •Supply voltage : 3.3 V Typ.
- •Output : LV-PECL or LVDS
- •Function : Output enable (OE)
- •Absolute pull range : ±10 × 10^{-6} Min. /±20 × 10^{-6} Min. / ±50 × 10^{-6} Min
- •Operating temperature : -40 °C to +85 °C /-40 °C to +105 °C

VG3225EFN
VG3225VFN
(3.2 × 2.5 × 1.05 mm)

VG5032EFN
VG5032VFN
(5.0 × 3.2 × 1.3 mm)


VG7050EFN
VG7050VFN
(7.0 × 5.0 × 1.5 mm)

Specifications (characteristics)

Item	Symbol	Specifications		Conditions / Remarks	
		LV-PECL	LVDS		
		VG3225EFN / VG5032EFN / VG7050EFN	VG3225VFN / VG5032VFN / VG7050VFN		
Output frequency range	fo	25 MHz to 250 MHz		Please contact us for available frequencies, and frequency inquiries above 250 MHz.	
Supply voltage	V_{CC}	C: 3.3 V ± 0.165 V			
Control voltage	Vc	1.65 V ±1.65 V			
Storage temperature	T_stg	-55 °C to +125 °C			
Operating temperature	T_use	G: -40 °C to +85 °C, H: -40 °C to +105 °C			
Frequency tolerance	f_tol	J: ±50 × 10^{-6} Max.		Includes initial frequency tolerance, temperature variation, supply voltage change and 10 years aging (+25 °C) at Vc = 1.65 V	
Absolute Pull range *1	APR	B: ±50 × 10^{-6} Min.		25 MHz ≤ fo ≤ 42.5 MHz, 50 MHz ≤ fo ≤ 85 MHz, 100 MHz ≤ fo ≤ 170 MHz	
		M: ±20 × 10^{-6} Min.		Full frequency range	
		S: ±10 × 10^{-6} Min.		Full frequency range	
Current consumption	I_{CC}	60 mA Max.	25 mA Max.	OE = V_{CC}, L_ECL = 50 Ω or L_LVDS = 100 Ω	
Disable current	I_dis	25 mA Max.	15 mA Max.	OE = GND	
Input impedance	Zin	10 MΩ Min.		DC level	
Frequency change polarity	-	Positive slope		V_C = 0 V to 3.3 V	
Symmetry	SYM	45 % to 55 %		At output crossing point	
Output voltage (LV-PECL)	V_{OH}	V_{CC} - 1.1 V Min.	–	DC characteristics	
	V_{OL}	V_{CC} - 1.5 V Max.	–		
Output voltage (LVDS)	V_{OD}	–	250 mV to 450 mV	Differential output voltage, V_{OD1}, V_{OD2}	DC characteristics
	V_{OS}	–	1.15 V to 1.35 V	Offset voltage, V_{OS1}, V_{OS2}	
ECL load condition	L_ECL	50 Ω	–	Terminated to V_{CC} - 2.0 V	
LVDS load condition	L_LVDS	–	100 Ω	Connected between OUT to $\overline{OUT}$	
Input voltage	V_{IH}	70 % V_{CC} Min.		OE terminal	
	V_{IL}	30 % V_{CC} Max.			
Rise/Fall times	tr / tf	0.5 ns Max..	0.3 ns Max.	LV-PECL: Between 20 % and 80 % of (V_{OH} - V_{OL}) LVDS: Between 20 % and 80 % of Differential Output peak to peak voltage	
Startup time	t_str	10 ms Max.		Time at minimum supply voltage to be 0 s	
Phase Jitter	t_{PJ}	120 fs Max.	160 fs Max.	fo = 122.88 MHz	Offset Frequency 12 kHz to 20 MHz
		80 fs Max.	80 fs Max.	fo = 245.76 MHz	

*1 Absolute pull range = Frequency control range- Frequency tolerance
* Please keep Vc pin open or ground while powering up V_{CC}.

Product Name (Standard form): VG3225 EFN 122.880000MHz C J G H B A
① ② ③ ④⑤⑥⑦⑧⑨
①Model ②Output (E: LV-PECL, V: LVDS) ③Frequency
④Supply voltage (C: 3.3 V Typ.) ⑤Frequency tolerance ⑥Operating temperature
⑦OE Function ⑧Absolute Pull Range ⑨Output Standby Type (A: High-Z)

⑤Frequency tolerance	
J	±50 × 10^{-6}

⑥Operating temperature	
G	-40 to +85 °C
H	-40 to +105 °C

⑦OE Function	
H	Active High

⑧Absolute Pull Range	
B	±50 × 10^{-6}
M	±20 × 10^{-6}
S	±10 × 10^{-6}

Figure 1 Available combination of ③Output frequency (fo) and ⑧Absolute Pull Range (APR)

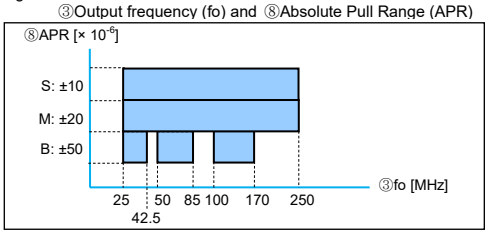

External dimensions (Unit:mm)

VG7050EFN
VG7050VFN

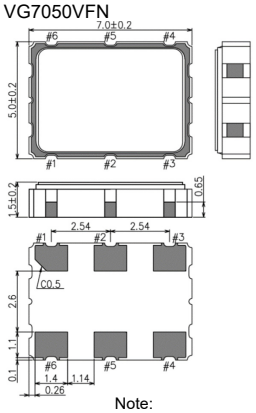

VG5032EFN
VG5032VFN



VG3225EFN
VG3225VFN



Pin map

Pin	Connection
1	Vc
2	OE
3	GND
4	OUT
5	$\overline{OUT}$
6	V_{CC}

Note:
OE pin = HIGH or "Open": Specified frequency output.
OE pin = LOW: Output is high impedance

Footprint (Recommended) (Unit:mm)

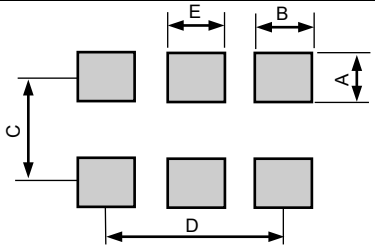

	VG3225EFN VG3225VFN	VG5032EFN VG5032VFN	VG7050EFN VG7050VFN
A	1.05	1.60	2.00
B	0.92	0.89	1.80
C	1.85	2.60	4.20
D	2.58	2.54	5.08
E	0.80	0.89	1.80

In order to achieve optimum jitter performance, it is recommended that 0.1 µF and 10 µF bypass capacitors should be connected between V_{CC} and GND and placed as close to the V_{CC} pin as possible.

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs, Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired IATF 16949 certification that is requested strongly by major automotive manufacturers as standard.

IATF 16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

►Explanation of the mark that are using it for the catalog

Pb Free	►Pb free.
RoHS Compliant	►Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
For Automotive	►Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
Automotive Safety	►Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

NOTICE：PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT ©Seiko Epson Corporation 2020

1. The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation (“Epson”) for the latest information and be always sure to check the latest information published on Epson’s official web sites and resources.
2. This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson’s prior consent.
3. Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties’ intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
4. Using Epson products, you shall be responsible for safe design in your products; that is, your hardware, software, and/or systems shall be designed enough to prevent any critical harm or damages to life, health or property, even if any malfunction or failure might be caused by Epson products. In designing your products with Epson products, please be sure to check and comply with the latest information regarding Epson products (including, but not limited to this document, specifications, data sheets, manuals, and Epson’s web site). Using technical contents such as product data, graphic and chart, and technical information, including programs, algorithms and application circuit examples under this document, you shall evaluate your products thoroughly both in stand-alone basis and within your overall systems. You shall be solely responsible for deciding whether to adopt/use Epson products with your products.
5. Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
6. No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
7. Epson products have been designed, developed and manufactured to be used in general electronic applications and specifically designated applications (“Anticipated Purpose”). Epson products are NOT intended for any use beyond the Anticipated Purpose that requires particular quality or extremely high reliability in order to refrain from causing any malfunction or failure leading to critical harm to life and health, serious property damage, or severe impact on society, including, but not limited to listed below (“Specific Purpose”). Therefore, you are strongly advised to use Epson products only for the Anticipated Purpose. Should you desire to purchase and use Epson products for Specific Purpose, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any Specific Purpose. Please be sure to contact our sales representative in advance, if you desire Epson products for Specific Purpose:
   Space equipment (artificial satellites, rockets, etc.)/ Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.) / Medical equipment/ Relay equipment to be placed on sea floor/ Power station control equipment / Disaster or crime prevention equipment/Traffic control equipment/ Financial equipment
   Other applications requiring similar levels of reliability as the above
8. Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for the purposes of military weapons development (e.g. mass destruction weapons), military use, or any other military applications. If exporting Epson products or our associated technologies, please be sure to comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A (EAR) and other export-related laws and regulations in Japan and any other countries and to follow their required procedures.
9. Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
10. For more details or other concerns about this document, please contact our sales representative.
11. Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.