



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.


## Product Specifications Approval Sheet


Product Description: SAW DPX 1950/2140 MHz LTE Band 1 SMD 1814

TST Part No.: TF0126A

Customer Part No.: \_\_\_\_\_

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: \_\_\_\_\_ Anne Chen 

Approved by: \_\_\_\_\_ Bob Chau 

Date: \_\_\_\_\_ 2017, 04, 10

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the change



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

## SAW DPX 1950/2140 MHz LTE Band 1 SMD 1814 (60 MHz BW)

MODEL NO.:TF0126A

REV.No.:2

### A. MAXIMUM RATING:

1. Operating temperature range: -20 °C to +85 °C
2. Storage temperature range: -20 °C to +85 °C
3. Input power : 29dBm (0.8W)(Ta=+50°C,>50000h,CW )
4. Maximum DC Voltage: +/-3 V
5. Moisture Sensitivity Level: Level 1
6. ESD 50V(MM) 100V(HBM)

RoHS Compliant  
Lead free  
Lead-free soldering

Electrostatic Sensitive Device (ESD)

### B. ELECTRICAL CHARACTERISTICS:

Terminating impedance (Tx Port): 50//22nH Ω(Single-ended)

Terminating impedance (Rx Port): 100//8.2nH Ω (Balanced)

Terminating impedance (Ant Port): 50//2.7nH Ω (Single-ended)

#### Tx to ANT (f<sub>T0</sub>=1950 MHz)

Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss	1950~1980MHz	dB(*1)	-	1.7	2.2	
Amplitude ripple	1950~1980MHz	dB	-	0.8	1.2	
VSWR	ANT	-	-	1.6	2.0	
	Tx	-	-	1.4	2.0	
<b>Attenuation:</b>						
<b>1574~1577 MHz</b>		dB	32	39		
<b>1805~1880 MHz</b>		dB	15	40		
<b>2010~2025 MHz</b>		dB	10	26		Ta=+15~85 °C
<b>2110~2170 MHz</b>		dB	40	49		
<b>2400~2500 MHz</b>		dB	30	50		
<b>3840~3960 MHz</b>		dB	30	38		

**ANT to Rx ( $f_{T0}=2140$  MHz)**


Parameters Description		Unit	Min	Typ	Max	Remarks
Insertion Loss	2110~2170 MHz	dB(*1)	-	1.8	2.2	
Amplitude ripple	2110~2170 MHz	dB	-	0.7	1.2	
Phase balance	2110~2170 MHz	Deg	-12	-8/+1	+12	
Amplitude balance	2110~2170 MHz	dB	-1.2	-0.2/+0.7	+1.2	
VSWR	ANT	-		1.4	2.0	
	Rx	-		1.7	2.1	
<b>Attenuation:</b>						
<b>1920~1980 MHz</b>		dB	45	49	-	
<b>1980~2025 MHz</b>		dB	20	41	-	
<b>2400~2500 MHz</b>		dB	30	40		

**Tx to Rx**

Isolation	1920~1980MHz	dB	53	57	-	
	2110~2170MHz	dB	47	51	-	


(\*1) Specification of insertion loss excludes loss that comes from the test board

**C.Evaluation Circuit**

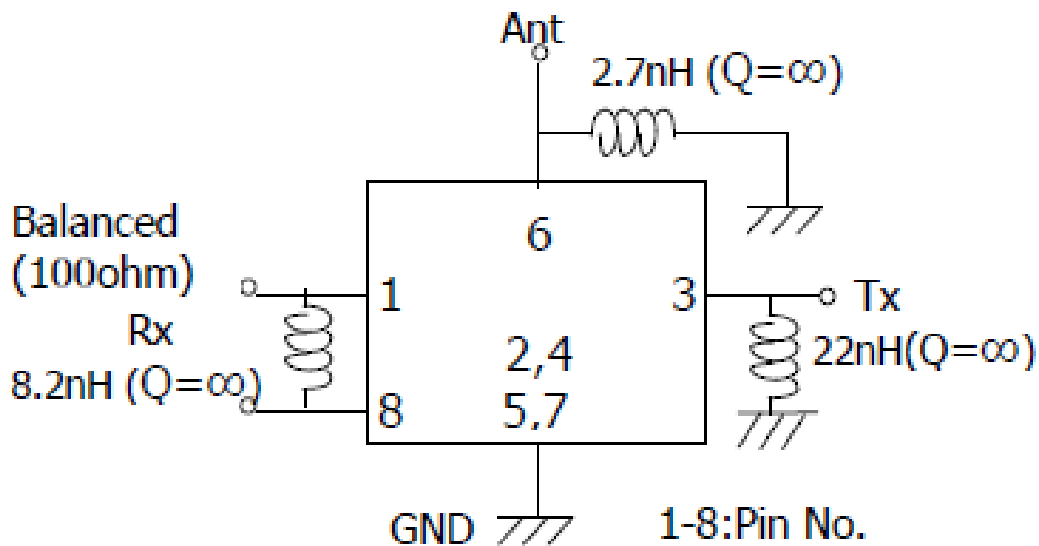


## D. FREQUENCY CHARACTERISTICS:

### Tx to Ant

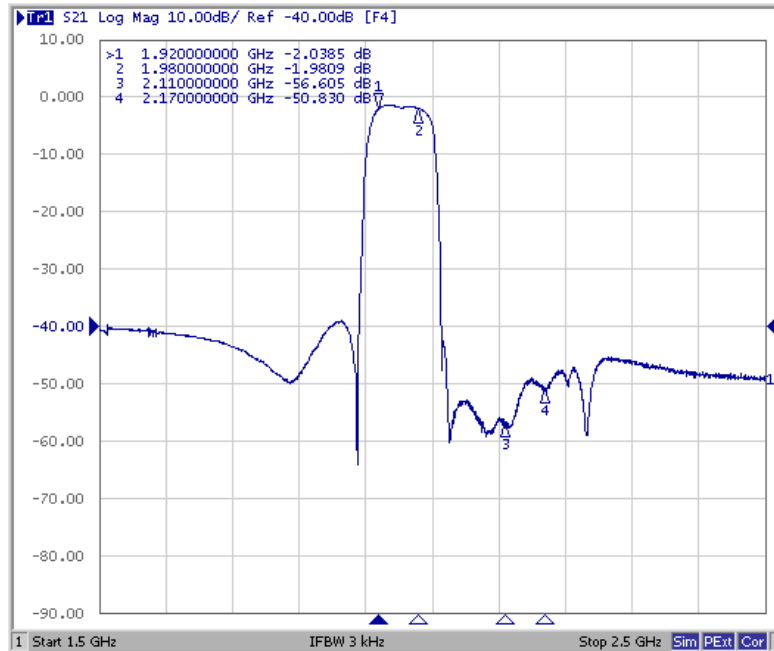


### Ant to Rx

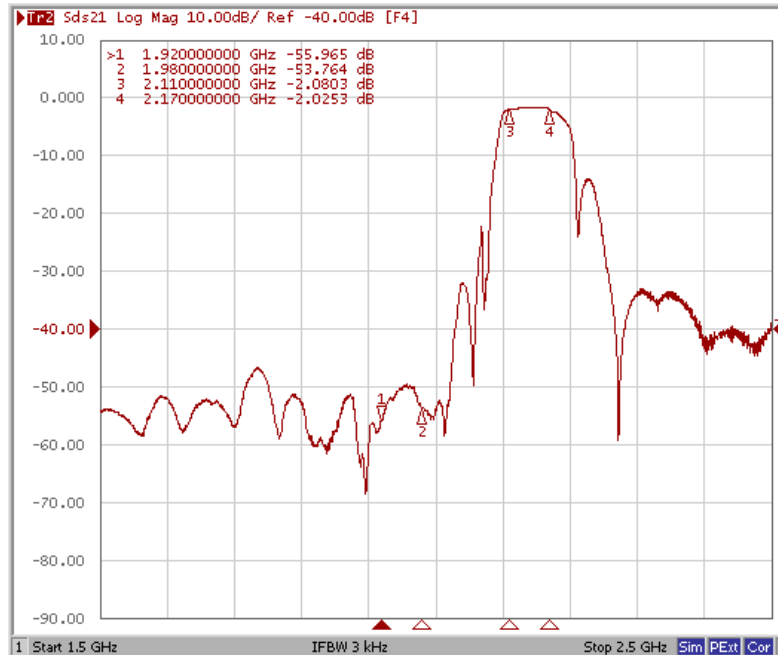

These data exclude loss that comes from the test board.

## Tx to Ant ,Ant to Rx

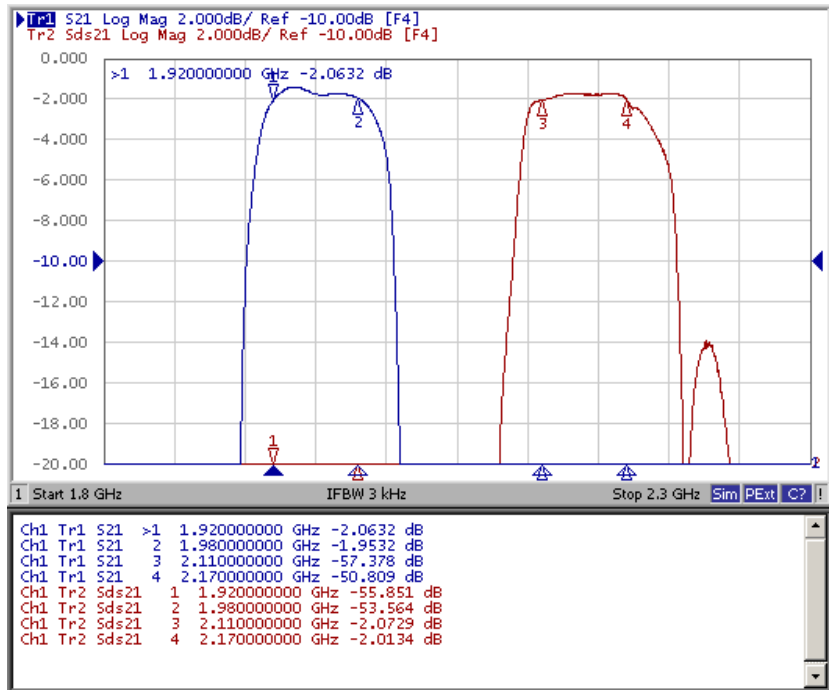


## Tx to Rx Isolation





These data exclude loss that comes from the test board.



# Tx Port

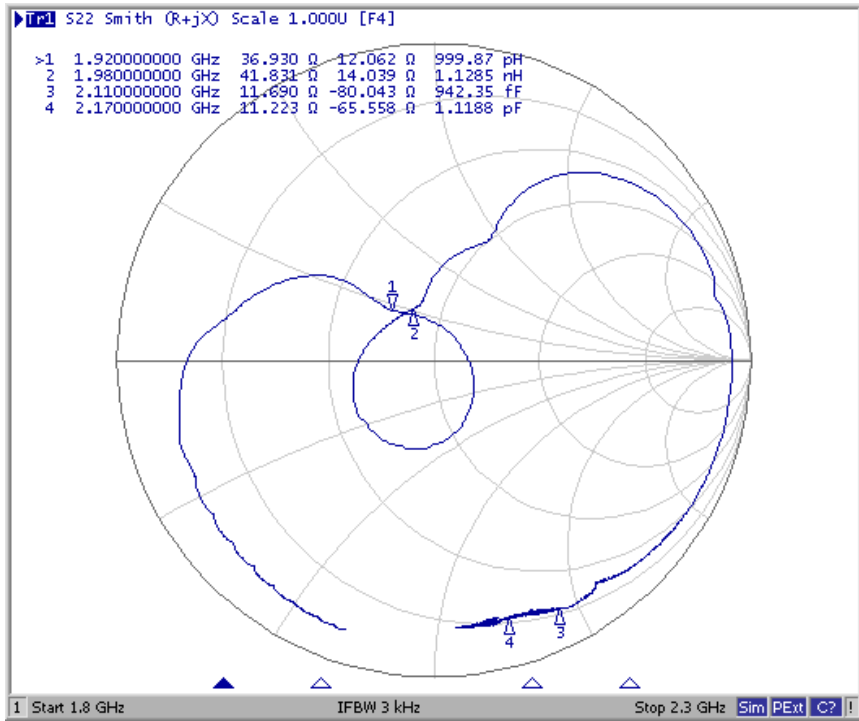

# Rx Port

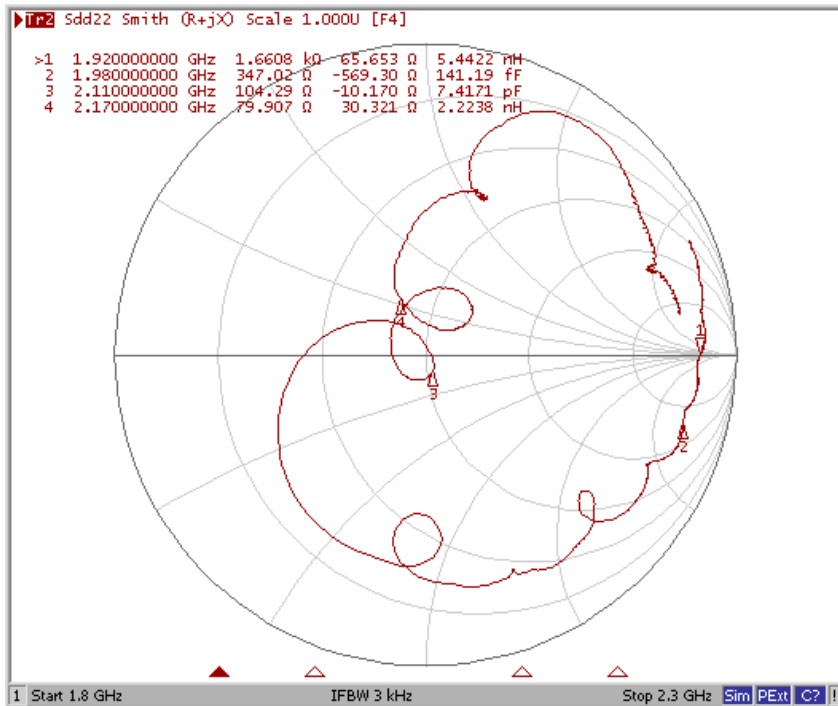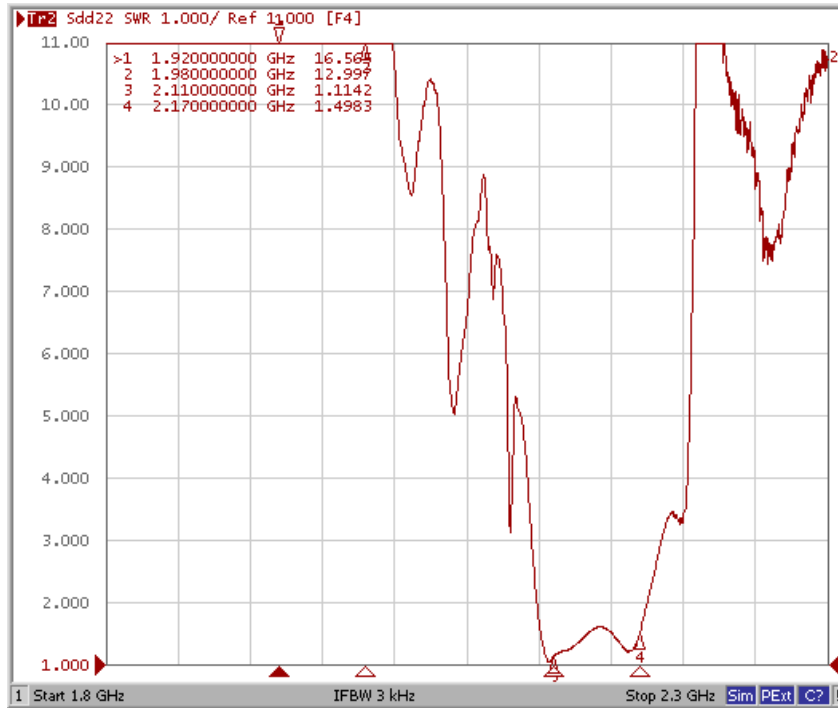


# Ant Port

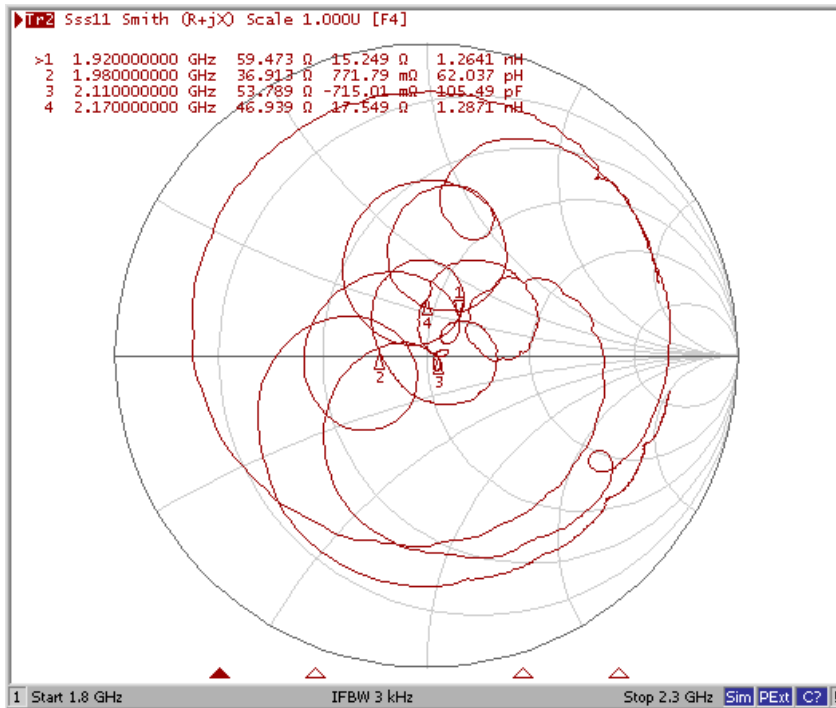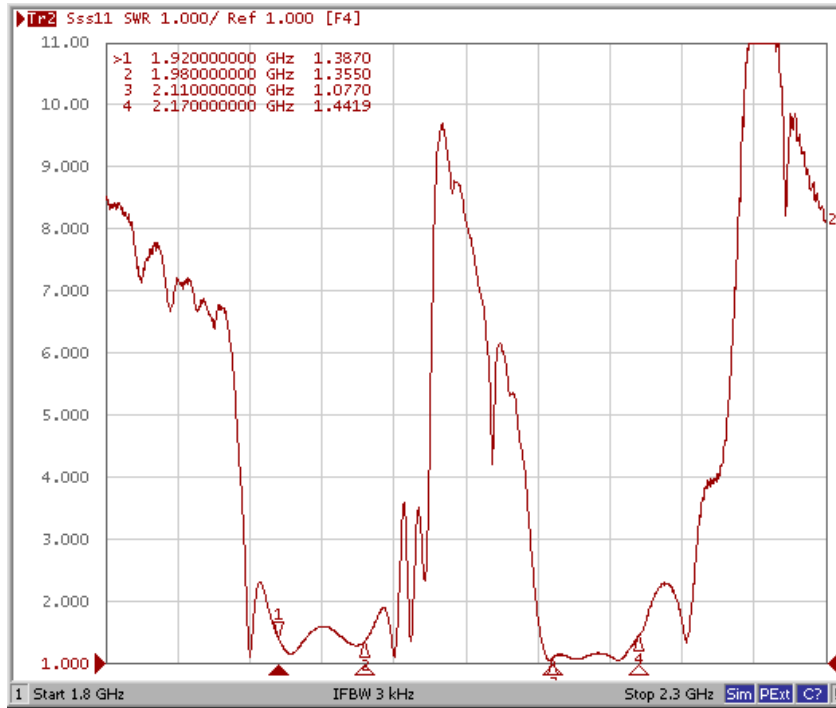





## Ant to Rx (Amplitude balance)

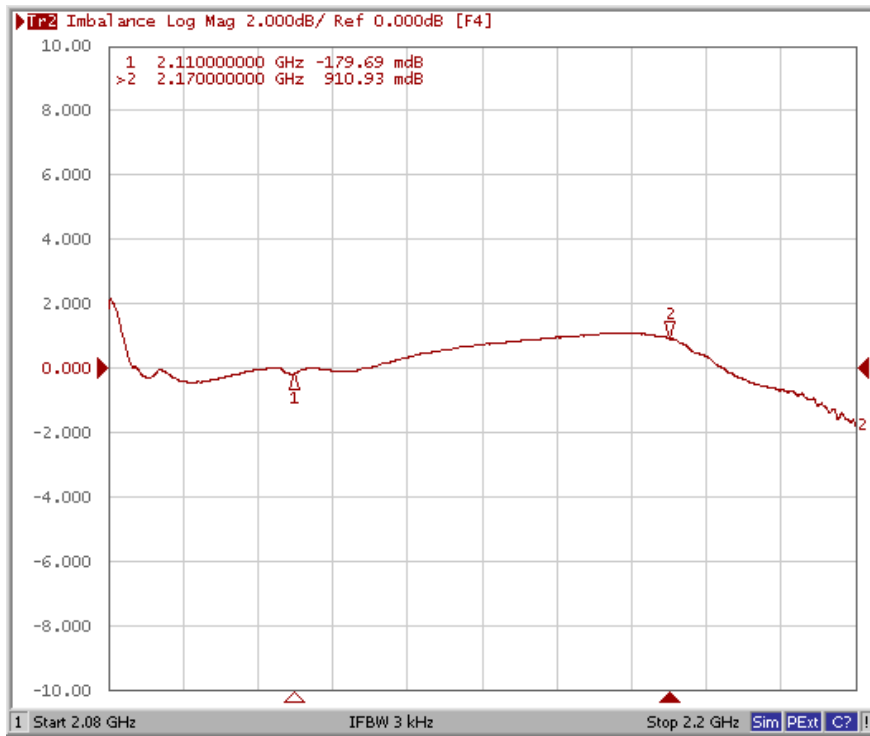


## Ant to Rx (Phase balance)

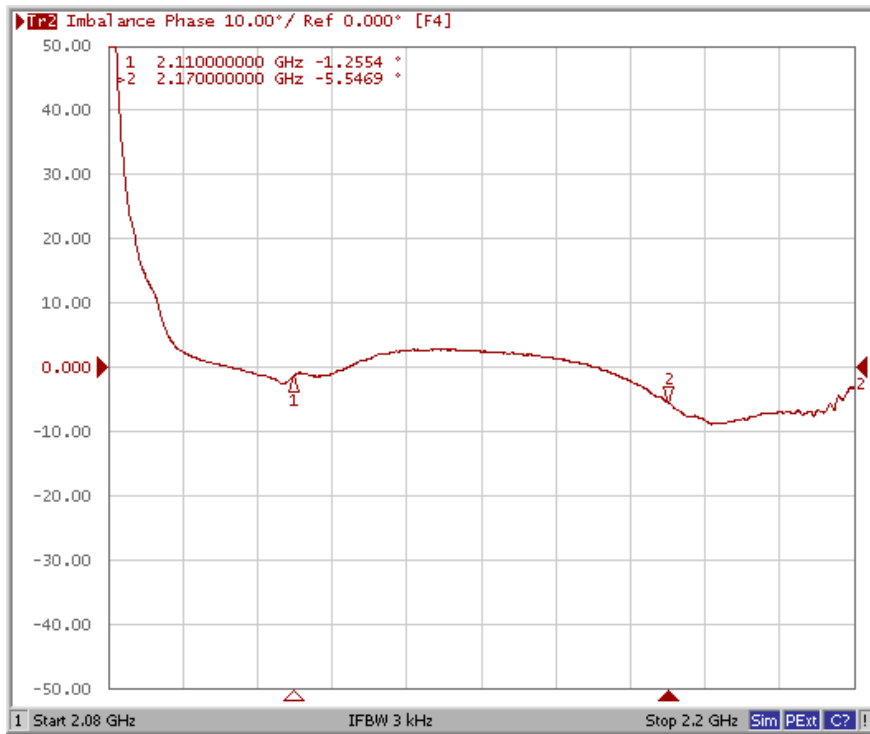


## Tx to Ant (Wide span)

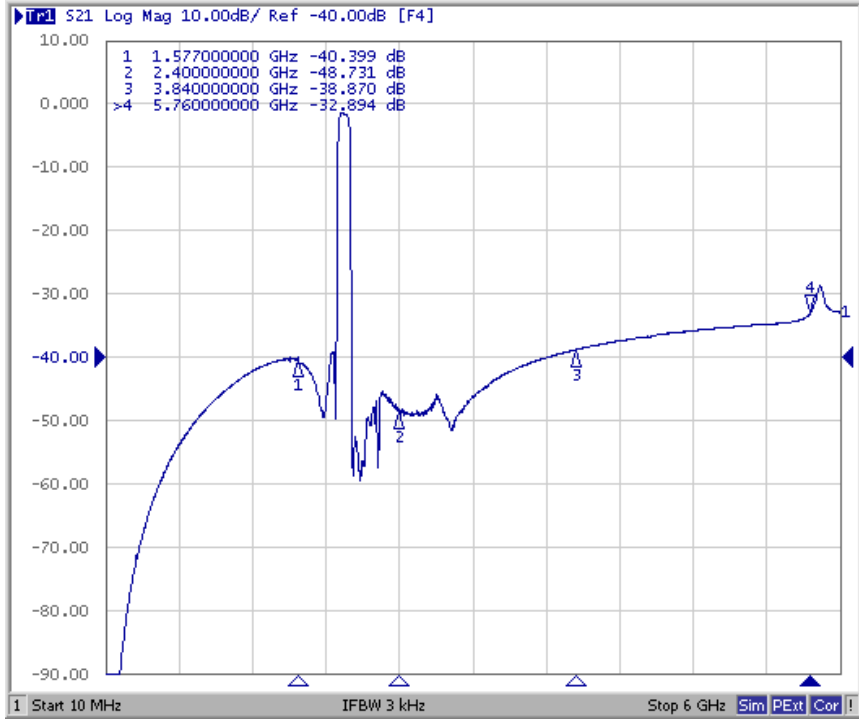

## Ant to Rx (Wide span)

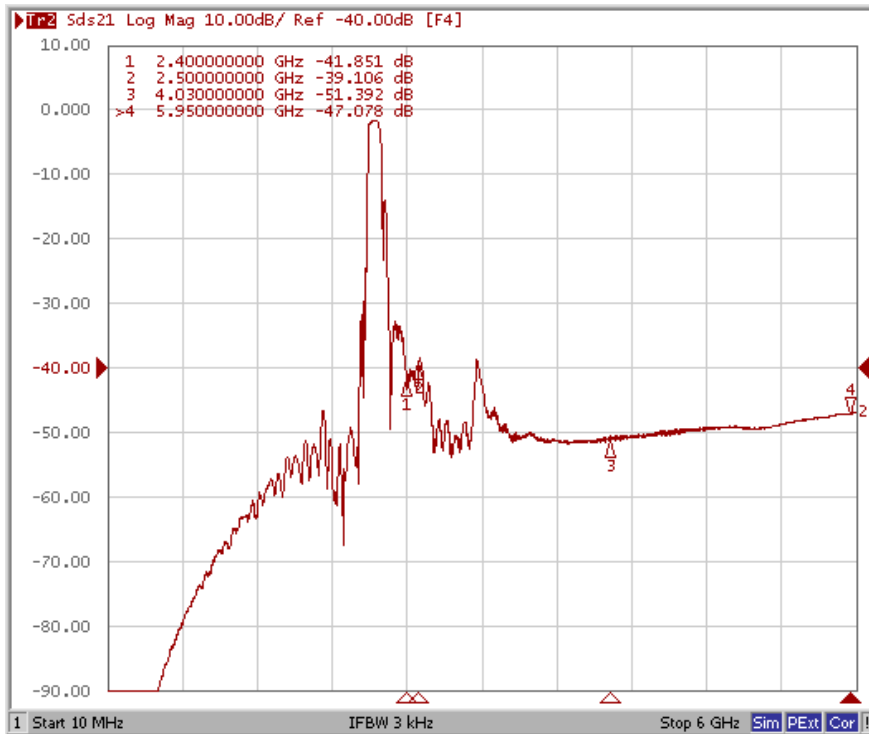

**E. OUTLINE DRAWIN:**

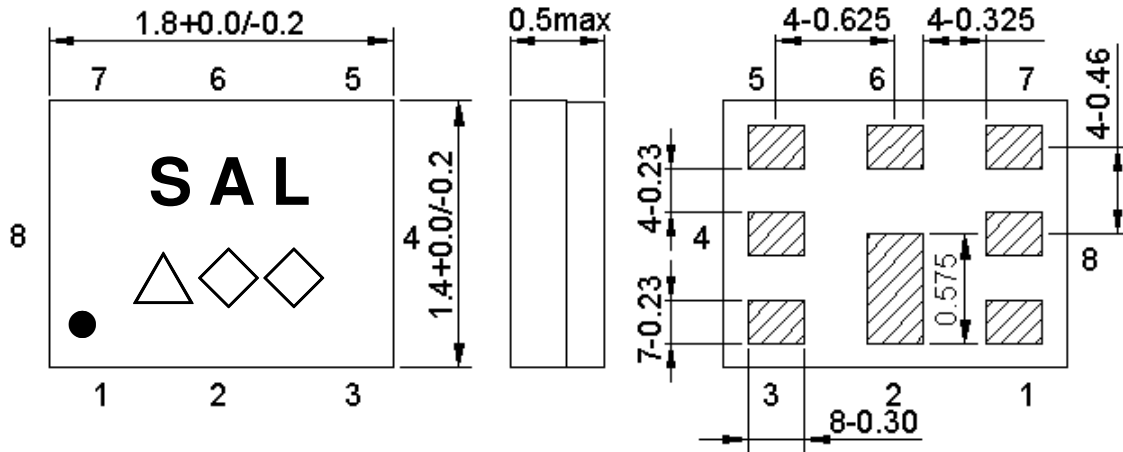

Marking name : **SAL**

△ : Date code( 2016 May → s ,....., 2019 Dec→m.)

◇◇: Lot Code.


Product Date Code. Follow below table.

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2016	n	p	q	r	s	t	u	v	w	x	y	z
2017	A	B	C	D	E	F	G	H	J	K	L	M
2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2019	a	b	c	d	e	f	g	h	j	k	l	m

**Pin Configuration:**


Pin No.	Pin Name	Description
1	Rx	Receive Pin
2	GND	Ground Pin
3	Tx	Transmitter Pin
4	GND	Ground Pin
5	GND	Ground Pin
6	ANT	Antenna Pin
7	GND	Ground Pin
8	GND	Ground Pin

**F. FOOTPRINT:**

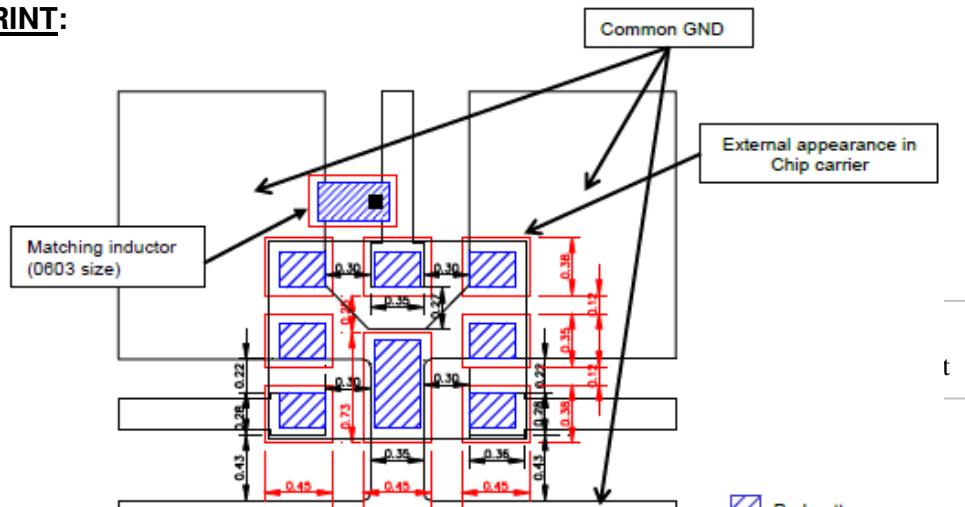

**G. PACKING:**

**1. REEL DIMENSION**

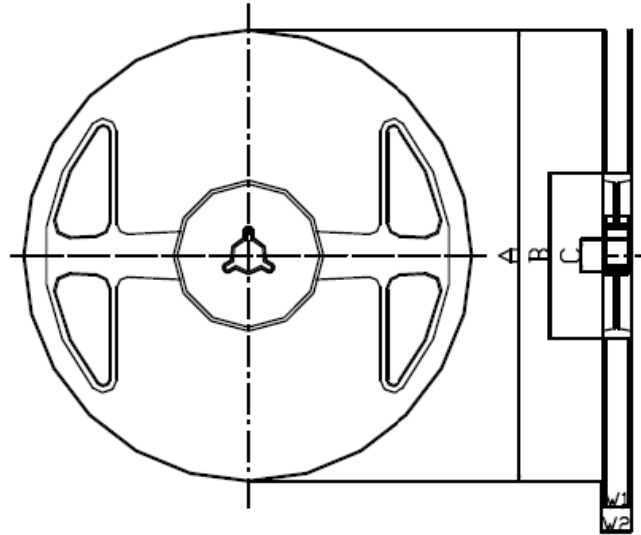

**Materials of Reel**

Material : Polystyrene + Carbon

Characteristics : Conforms to EIAJ-ET-7200A


Color : Black

Surface resistance (reference value) :  $10^9 \Omega/\text{sq Max.}$

Unit : mm

Code	Quantity	A	B	C	W1	W2
Z	3,000 pcs	$\phi 180.0 +0.0/-1.5$	$\phi 66.0 +/-0.5$	$\phi 13.0 +/-0.2$	$9.0 +1.0/-0.0$	$11.4 +/-1.0$

**2. TAPE DIMENSION**

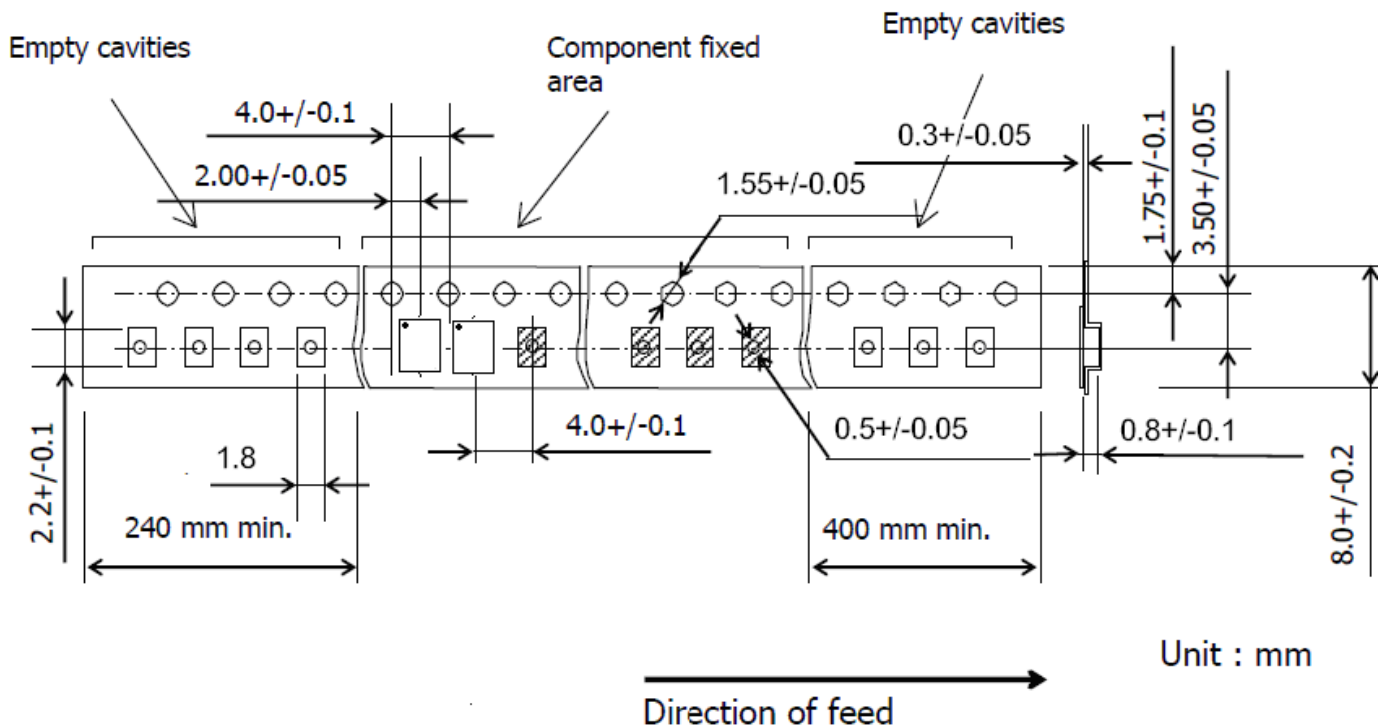

Unit : mm

## H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 245~260°C peak (min. 10sec).
4. Time : 2 times.

